

WIRELESS SENSOR TRANSMITTER



SKU: WS433-M12F

WIRELESS SENSOR WS433-M12F



WS433-M12F-H1.PNG

WS433-M12F Wireless sensor transmitter utilizes the Sub-GHz technology from Texas Instruments allows long range transmission at ultra-low power consumption. This wireless module can connect with many kinds of measurement sensor, such as temperature, humidity, pressure, level, flow, RTD input, Thermocouples input...It automatically detects the attached measurement sensor. It is configured the operation parameters like data sending interval, health check cycle...remotely from Globiots platform or via ModbusRTU software. The wireless module can last up to 10 years with a single AA battery.



RELIABLE & SECURED WIRELESS CONNECTION

Sub-GHz technology from Texas Instruments allows reliable wireless connection and secured data by AES-128



10-YEAR WITH A SINGLE BATTERY

Ultra-low power sensing technology from Daviteq with Ultra-low power wireless technology from Texas Instruments allow the sensor can last up to 10 years with a single battery AA.



EXCHANGEABLE SENSOR MODULES

Customer can exchange other sensor module at any time like Plug & Play. Selection of many kinds of sensor: temperature, humidity, pressure, level, flow...



LONG RANGE TRANSMISSION

Narrow Band techniques & Sub-GHz technology allow long distance transmission at lowest energy consumption

WIRELESS SENSOR WS433-M12F FITTED WITH PRESSURE SENSOR



WS433-M12F-H2.PNG

DAVITEQ TECHNOLOGIES INC

No.11 Street 2G, Nam Hung Vuong Res., An Lac Ward, Binh Tan Dist., Ho Chi Minh City, Vietnam

+84.28.6268.2523 / 6268.2524

info@daviteq.com

www.daviteq.com

JAN-2021 | Doc No: WS433-M12F-DS-EN-10

1/4

SPECIFICATION


Sensor modules support	Compatible with all DULP sensor modules produced by Daviteq. Refer to the sensor table in the first page. List of compatible sensor modules depends on FW version of WS433-M12F(-T). ** DULP (Digital Ultra Low Power)
Sensor port connector	M12-female, 4-pin A-coding
Data speed	Up to 50kbps
Transmission distance, LOS	500m
Antenna	Internal Antenna
Battery	01 x AA 1.5 - 3.6VDC, up to 10-year operation, depends on configuration
Frequency Band	ISM 433Mhz, Sub-GHz technology from Texas Instrument, USA
Receiving Sensitivity	-110dBm at 50kbps
International Compliance	ETSI EN 300 220, EN 303 204 (Europe) FCC CFR47 Part15 (US), ARIB STD-T108 (Japan)
Security Standard	AES-128
Operating temperature of PCB	-40oC..+60oC (with AA L91 Energizer)
Housing	Poly-carbonate, IP67
Installation method	L-type bracket SUS304 , by M4 screws or double-sided 3M tape (included)
Product dimensions	125x30x30mm
Net weight (without battery)	< 60g
Box dimension	190x50x50mm
Gross weight	100g

INSTALL BATTERY IN WS433



WS433-M12F-H3.PNG

DIMENSION DRAWINGS OF WS433-M12F (UNIT: MM)

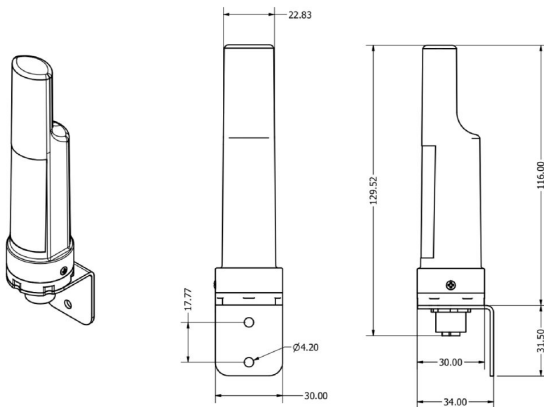

WS433-M12F-H5.PNG

CARTON BOX OF WIRELESS SENSOR



SIZE: DIA. 50MM X 180MM LENGTH

WS433-M12F-H6.PNG

PRODUCT PACKAGE INCLUDES



WS433-M12F-H7.PNG

RECOMMENDED BATTERIES for WIRELESS SENSOR WS433

E91 AA Alkaline battery



-18 .. + 60 oC working temperature

10-year shelf life

3000 mAh Capacity

Price: 1X

WS433-M12F-H8.PNG

L91 AA Lithium battery



-40 .. + 60 oC working temperature

20-year shelf life

3500 mAh Capacity

Price: 3.5X

ORDERING INFORMATION

ITEM CODE	DESCRIPTIONS
WS433-M12F	Wireless Sensor Transmitter 433Mhz, compatible with all DULP sensor modules, AA 1.5VDC battery, IP67
Notes	